


Foster Display Chiller 1200mm Closed Front Assisted Service FDC1200C



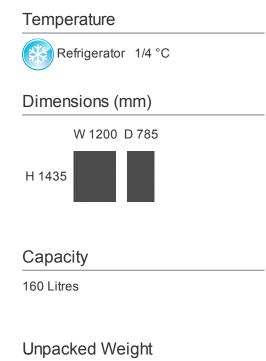

Features & Benefits

In its closed front format, the Foster Display Chiller provides a stylish solution to the demands of assisted service: showing your customers the best possible view of your food, in an ergonomically designed easy access display. Fresh is always best, and with the closed front design, your pre-prepared cakes, pastries and delicatessen can stay at their best without compromising your service times.

- ACT (Anti Condensation Technology) helps glass to remain clear, maximising product display
- Glass end panels over 70% wider than many models in the market, maximising your display window
- Thick toughened glass for enhanced safety across both open and closed fronted models
- Manufactured using superior 304 stainless steel the 'gold standard' in performance finishes meaning quality is assured
- Foster's innovative air curtain protects your merchandise from warmer air entering the display ensuring your food keeps both its taste and texture
- Brilliantly bright LED lighting in top canopy and on every shelf significantly enhances product display
- Innovative design means the controller can be positioned to the front or rear allowing on site flexibility
- There when you need us: Unrivalled 2 year parts and labour warranty as standard for complete peace of mind (UK only)

| External Finish | | | |
|------------------------------------|-------------|----------|--|
| 304 Stainless Steel | | Standard | |
| Internal Finish | | | |
| 304 Stainless Steel | | Standard | |
| Shelving | | | |
| 10mm Thick Glass Shelving | Quantity: 3 | Standard | |
| Base Fittings | | | |
| Roller Castors | | Standard | |

| Refrigera | ation |
|---------------|--|
| Forced Air | Standard |
| Integral | Standard |
| Depth | The unit is designed to |
| Note: | operate at M2 temperature requirements (EN441 |
| | Climate Class 3 25° |
| | ambient) |
| R404a | Standard |

| Electrical Data & Service Information | | |
|--|----------|--|
| 230 Volts | Standard | |
| 50Hz | Standard | |
| 1 Phase | Standard | |
| Fuse Required (A) | 13 amp | |

Foster-Fridge.com

Telephone: 01582 865050 Facsimile: 01582 645947 Email: info@foster-fridge.com



Demand more. Choose Foster