



# Product Code: EP1/3H 12-176

## EcoPro G2 1/3 Refrigerated Counter

---



## Features & Benefits

---

- High Quality 304 Stainless Steel Exterior Build Quality
- ECA Scheme Approved - as ECA products are guaranteed to be energy efficient, money can be claimed back on your investment
- Smartphone style' touch sensitive hidden until lit control pannel
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- High performance cyclopentane foam
- Airlines' ventilation system reduces compressor running time by 15%
- Take the travel out of food preparation
- Reduce width option available on request

## Shelving

<b>6 shelves (GN1/1)</b>	Standard
<b>Additional S/S Trayslides</b>	Option
<b>Additional GN1/1 Shelf</b>	Option

## Refrigeration

<b>R290 - Energy Efficient</b>	Standard
<b>Integral Refrigeration System</b>	Standard
<b>Less Condensing Unit</b>	Option
<b>RH Mounted Ref Unit</b>	Option

## Specification

<b>Refrigerator +1/+4°C</b>	Standard
<b>Width (mm)</b>	1865
<b>Depth (mm)</b>	700
<b>Height (mm)</b>	865
<b>Unpacked weight (Kgs)</b>	145
<b>Packed weight (Kgs)</b>	165.87
<b>Gross Volume (Ltr)</b>	435

## Base Fittings

<b>Remote Refrigeration System</b>	Option
<b>Castors 80mm</b>	Standard
<b>100mm legs in lieu of castors</b>	Option
<b>Legs 150mm</b>	Option

## Electrical & Service Data

<b>Connect Load</b>	310
<b>230/50/1</b>	Standard
<b>Fuse Required (A)</b>	10
<b>Refrigerant Charge (kg)</b>	0.150

## Finish

<b>304 s/s ext &amp; alu int</b>	Standard
<b>304 S/S back for island sitting</b>	Option
<b>Worktop</b>	Standard

## Doors

<b>Solid</b>	Standard
--------------	----------

## Product Extras

<b>Helicoil Mains Lead</b>	Option
<b>Less Worktop</b>	Option
<b>Marine Spec</b>	Option

## Energy

<b>kWh (24 hours)</b>	1.34
<b>AEC</b>	488.455118
<b>Nett Volume</b>	258.375
<b>Energy Grade</b>	A
<b>Global Warming Potential</b>	3
<b>Energy Efficiency Index</b>	19.94



## Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the counter
- 60Hz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm

# Energy Performance Data and information



Foster Refrigerator - a division of ITW Ltd  
Oldmeadow Road, KING'S LYNN, Norfolk PE30 4JU  
Tel: +44(0) 1553 691222  
Registered in England No. 00559693  
VAT No. GB 792 4414 16

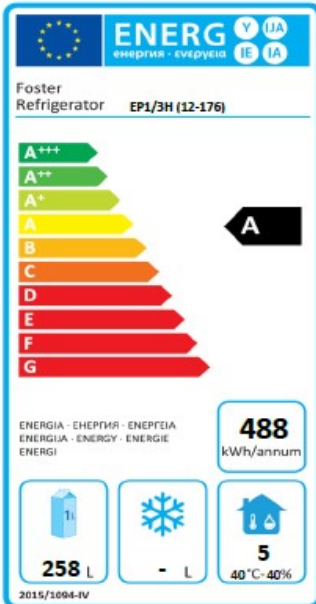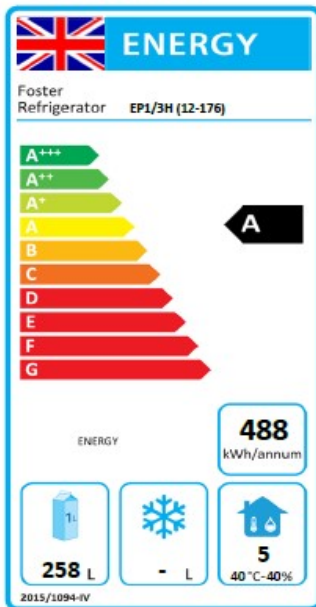

## Application

This appliance is intended for use in ambient temperatures up to {1}°C

## Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

## Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.