




Demand more. Choose Foster

EcoPro G2 1350 Litre Upright Undermount Refrigerated Cabinet EP1440HU




Temperature

 Refrigerator +1/+4 °C

Dimensions (mm)

W 1440 D 865
H 1980



Capacity

1350 Litres

Weight

Unpacked: not available Packed: not available

Features & Benefits

We've revolutionised professional refrigeration... again. Built from the ground up to include over 50 new features and innovations, the EcoPro G2 is loaded with new design, quality, reliability efficiency and performance features.

- Provides an alternative format for high ambients as it takes cooler air from floor level
- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circular II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet

External Finish	
304 Stainless Steel	Option
Stainless Steel	Standard
304 Stainless Steel Rear For Island Siting	Option

Internal Finish	
304 Stainless Steel	Option
Aluminium	Standard

Shelving	
GN 2/1 Shelf	Quantity: 6 Standard
Additional Shelf	Option

Base Fittings	
80mm Castors	Standard
150mm Legs	Option
Roller Castors	Standard


Doors	
Solid Full	Standard

Refrigeration	
Forced Air	Standard
Integral	Standard
R290 (Hydrocarbon)	Standard
R134a	Standard

Electrical, Energy and Service Information	
230 Volts	Standard
50Hz	Standard
60Hz	Option
1 Phase	Standard
Running Watts	607
Running Amps	4.4
Thermal Heat Rejection (W)	627
Noise (dBa @ 1m)	TBC
Fuse Required (A)	10 amp
Refrigerant charge	0.15
Global Warming Potential	3
Energy Efficiency Index	91.03

Footnotes

- Optional castors supplied as standard increase overall height to 2070mm
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 150mm.
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet.
- Marine kit option includes legs, bulkhead brackets & marine shelves.

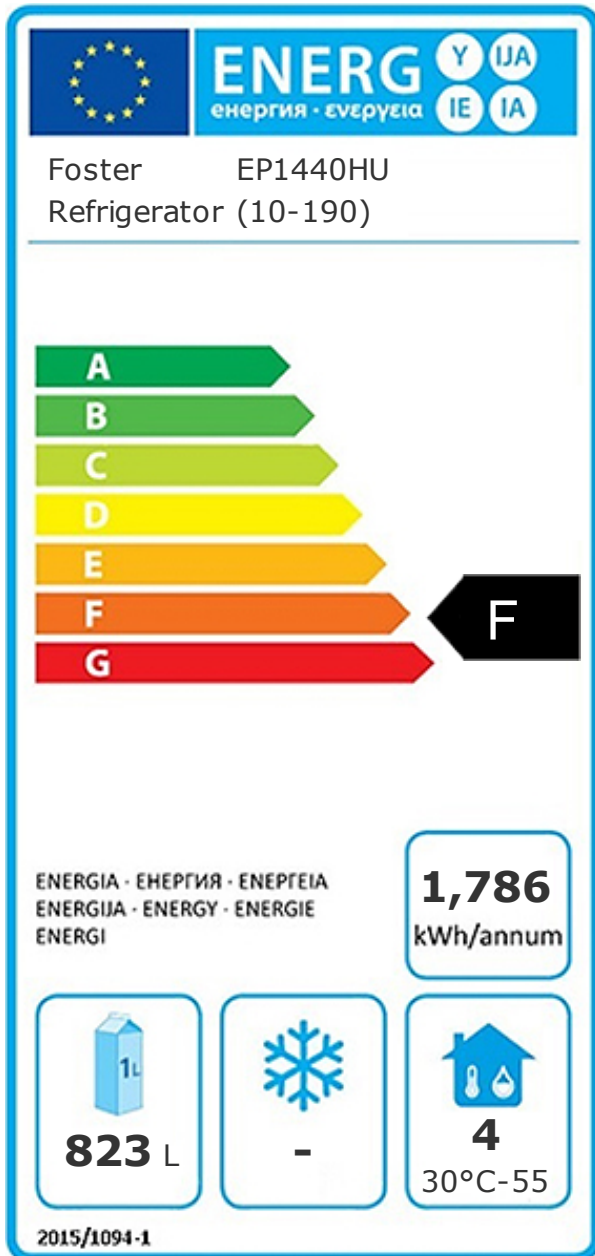

Application

This appliance is intended for use in ambient temperatures up to 40°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit www.fosterrefrigerator.co.uk/Foster-OurPolicies.asp

Foster Refrigerator

Oldmedow Road - King's Lynn - Norfolk - PE30 4JU - United Kingdom

Telephone: **0843 216 8800** Facsimile: **0843 216 4700** Email: sales@foster-uk.com

**FOSTER
GREEN
PROCUREMENT**



Demand more. Choose Foster