




Demand more. Choose Foster

Eco Pro G2 1/4 Freezer Counter EP14L



Temperature

 Freezer -18/-21 °C

Dimensions (mm)

W 2320 D 700
H 865

Capacity

585 Litres

Weight

Unpacked: 163 KG Packed: not available

Features & Benefits

Providing excellence and practicality at a very competitive price, the Eco Pro range generates significant energy and carbon reductions in use saving you money on your operating costs whilst at the same time never compromising on your commitment to food safety

- High Quality 304 Stainless Steel Exterior Build Quality
- 60mm all-round insulation improves energy efficiency
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- Concealed refrigeration system maximises capacity with a tidy and practical interior

| External Finish | |
|--|----------|
| 304 Stainless Steel | Standard |
| 304 Stainless Steel Rear For Island Siting | Option |

| Internal Finish | |
|---------------------|----------|
| 304 Stainless Steel | Option |
| Aluminium | Standard |

| Shelving | |
|-----------------------------------|----------------------|
| Additional Shelf | Option |
| Nylon Coated Gastronorm 1/1 Shelf | Quantity: 8 Standard |

| Base Fittings | |
|-----------------|----------|
| 80mm Castors | Standard |
| 150mm Legs | Option |
| Levelling Bolts | Option |

| Doors | |
|------------|----------|
| Solid Full | Standard |

| Worktop & Drawers | |
|-------------------|----------|
| Worktop | Standard |
| 100mm Splashback | Option |
| Less Worktop | Option |

| Refrigeration | |
|-------------------------------|----------|
| Forced Air | Standard |
| Integral | Standard |
| Remote - less condensing unit | Option |
| R290 (Hydrocarbon) | Standard |
| R404a | Option |
| Drain Required? | No |


| Electrical, Energy and Service Information | |
|--|----------|
| 230 Volts | Standard |
| 50Hz | Standard |
| 1 Phase | Standard |
| Running Watts | 683 |
| Running Amps | 4.6 |
| Thermal Heat Rejection (W) | 693 |
| Noise (dBa @ 1m) | TBC |
| Fuse Required (A) | 10 amp |
| Global Warming Potential | 3 |
| Energy Efficiency Index | 70.57 |

| Product Extras | |
|---|--------|
| Helicoil Mains Lead | Option |
| Marine Kit | Option |
| Width Reduction (178mm reduction available when remote option selected) | Option |

Footnotes

- Marine kit option includes legs, bulkhead brackets, rat proofing & marine shelves.
- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm.
- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet.
- 60Hz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm

Energy Performance Data and information

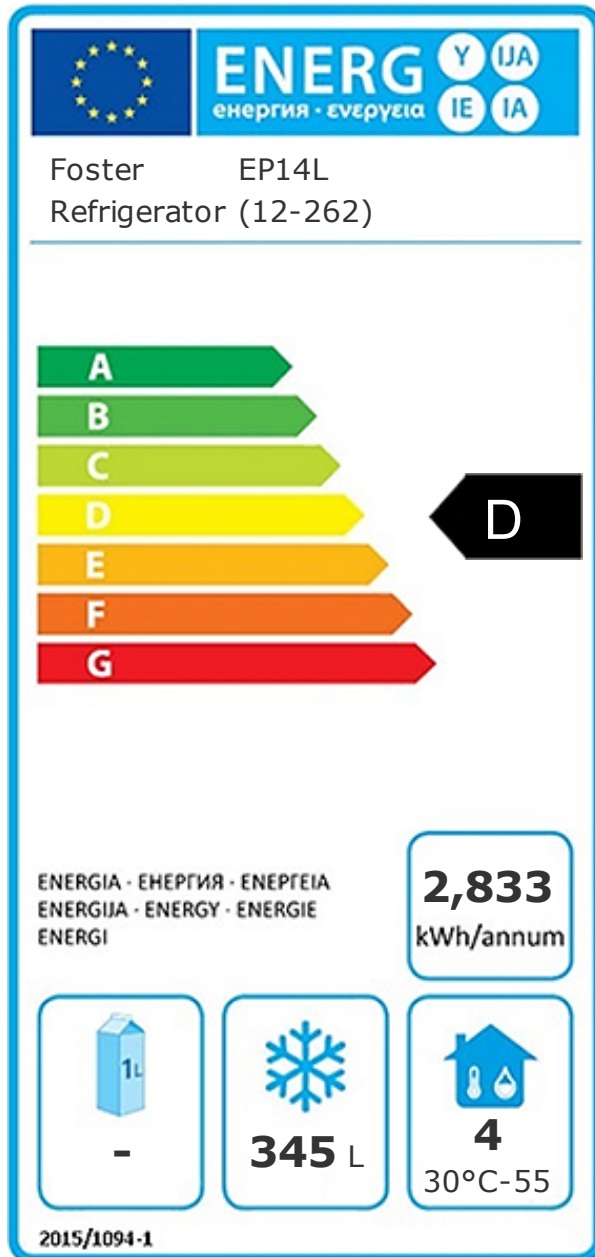

Application

This appliance is intended for use in ambient temperatures up to 40²⁰₁₁°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit www.fosterrefrigerator.co.uk/Foster-OurPolicies.asp