


# EcoPro G2 600 Litre Upright Refrigerated Cabinet EP700H



#### Temperature

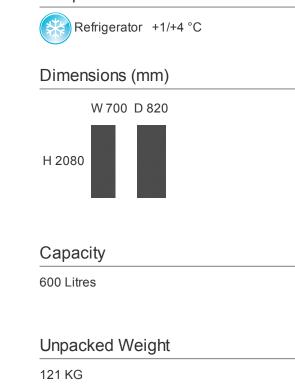

#### Features & Benefits

We've revolutionised professional refrigeration... again. Built from the ground up to include over 50 new features and innovations, the EcoPro G2 is loaded with new design, quality, reliability, efficiency and performance features.

- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet

External Finish		Doors		Electrical Data & Service	
304 Stainless Steel	Option	Solid Full	Standard		
Stainless Steel	Standard	Solid Half	Option	230 Volts	Standard
304 Stainless Steel Rear	Option	Hinged - Right Hand	Standard	50Hz	Standard
For Island Siting		Hinged - Left Hand	Option	60Hz	Option
Internal Finish		Pass Through	Option	1 Phase	Standard
		Glass with Lights	Option	Running Watts	260
304 Stainless Steel	Option			Running Amps	1.8
Aluminium	Standard	Refrigeration		Thermal Heat Rejection	270
Shelving		Forced Air	Standard	(W)	
		Integral	Standard	Noise (dBa @ 1m)	68.6
GN 2/1 Quantity: 3	Standard	R290 (Hydrocarbon)	Option	Fuse Required (A)	10 amp
Shelf		R134a	Standard	Product Extras	
Additional Shelf	Option	Drain Required?	No	Helicoil Mains Lead	Option
				Door Pull Handle	Option
Base Fittings				Marine Kit	Option
80mm Castors	Standard				-1
150mm Legs	Option				

### Footnotes

- Marine kit option includes legs, bulkhead brackets, marine shelves & latch handle
- Hydrocarbon option not available on glass door models
- 32oC ambient on glass door refrigerator model
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm •
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

## FosterËØ aå\*^È&[{

Telephone: 01582 865050 Facsimile: 01582 645947 Email: info@foster-fridge.com















150 14001

Demand more. Choose Foster